



FUJIAN YAHENG POWER TECHNOLOGY GROUP CO.,LTD

6FM28H 12V28AH





6FM28H is a high rate discharge battery. It is specially designed for applications where need high power output. By optimum design of battery grids and plate formula, the battery can deliver up to 40% more power than the standard range. Suitable for UPS/EPS where high current loads is required.

Specification

Cells Per Unit	6
Voltage Per Unit	12V
Capacity	130W@10min-rate to 1.75V per cell @ 25°C
Weight	Approx. 9.5kg (Tolerance±3%)
Max. Discharge Current	280A(5sec)
Internal Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25±5°C
Float Charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging	8.4A Current Limit
Equalization and Cycle service	14.6 to 14.8 VDC /unit Average at 25°C
Self Discharge	YAHENG Vale Regulated Lead Acid(VRLA) Can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using
Terminal	Terminal F12/L12
Container Material	A.B.S. UL94-HB, Flammability resistance of UL94-V2 can be avail upon request

Dimension:

Unit:mm Dimensions:165(L)×126(W)×175(H)

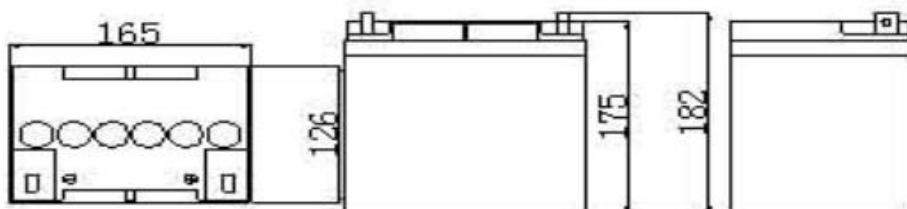

Constant Current Discharge Characteristics: A(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	109.2	72.66	57.17	32.86	20.52	12.24	8.638	7.112	5.576	3.433	2.915	1.571
10.0V	105.3	70.87	55.37	32.45	19.98	12.01	8.497	7.028	5.375	3.402	2.885	1.535
10.2V	99.13	67.41	53.86	31.97	19.81	11.90	8.40.	6.786	5.189	3.363	2.865	1.514
10.5V	89.21	63.10	50.86	31.12	19.44	11.75	8.364	6.583	5.092	3.263	2.835	1.496
10.8V	80.03	58.91	48.04	30.12	19.10	11.67	8.098	6.246	4.986	3.220	2.798	1.437
11.1V	70.15	54.09	44.40	29.02	18.62	11.24	8.136	6.041	4.880	3.198	2.734	1.415

Constant Power Discharge Characteristics: W(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	1154	788.5	615.8	375.7	238.6	141.1	95.28	76.84	65.09	43.71	37.53	22.83
10.0V	1135	775.4	606.7	368.9	235.3	139.0	95.07	76.54	64.79	43.53	37.26	22.16
10.2V	1089	745.8	598.8	365.8	233.6	138.2	94.78	76.04	64.18	43.24	36.98	21.85
10.5V	998.7	716.5	569.4	359.5	230.6	137.2	94.34	75.53	63.48	42.95	36.57	21.35
10.8V	901.3	668.9	539.8	351.2	227.3	135.9	93.25	74.88	62.76	42.75	36.25	20.45
11.1V	800.5	619.3	508.6	342.5	223.8	129.8	90.60	73.95	62.23	42.53	35.14	19.50

All mentioned values are average values.



FUJIAN YAHENG POWER TECHNOLOGY GROUP CO.,LTD

Temperature and Valid Capacity



Discharge Characteristics at Various Rates @25°C/77



Charge characteristic curve for standby use



Storage characteristic



Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.75V	1.60V
Discharge Current (A)	$A \leq 0.2C$	$0.2C \leq A \leq 1.0C$	$\geq 1.0C$

Charge the batteries at least once every six months, if they are stored at 25°C

Charging Method:

Constant Voltage	$-0.2C \times 2h + 2.4 - 2.45V/cell \times 24h$, Max. Current 0.3CA
Constant Current	$-0.2C \times 2h + 0.1CA \times 12h$
Fast	$-0.2C \times 2h + 0.3CA \times 4.0h$

Maintenance & Cautions

Float Service

- ✘ Every month, recommend inspection every battery voltage
 - ✘ Every three months, recommend equalization charge for one time.
- Equalization charge method:
- Discharge: 100% rate capacity discharge.
- Charge: Max. Current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h
- ✘ Effect of temperature on float charge voltage: -3mV/Cell.
 - ✘ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.

Contact us:

Fujian Yaheng Power Technology Group Co.,Ltd

Add: Yaheng Industrial Park, Jianyang District, Nanping City, Fujian Province, China

Website: www.yahengpower.com

Email: liwendu@yahengpower.com

Tel: +86-599-5837578 Fax: +86-599-5823986