


GFM1500 is a general purpose battery with 18 years floating design life. With heavy duty grid, thick plates, special additives, GFM series battery maintain very long life time and stable performance.



Specification

Cells Per Unit	1
Voltage Per Unit	2
Capacity	1500AH@10hr-rate to 1.75V per cell @ 25°C
Weight	Approx.95kg (Tolerance ± 3%)
Max. Discharge Current	6000A(5sec)
Internal Resistance	Approx. 0.50mΩ
Internal Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25 ± 5°C
Float Charging Voltage	2.27 to 2.3 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	300A
Equalization and Cycle service	2.43 to 2.47 VDC /unit Average at 25°C
Self Discharge	YAHENG Vale Regulated Lead Acid(VRLA) Can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using .
Terminal	Thread insert & Bolt (F10)
Container Material	A.B.S. UL94-HB, Flammability resistance of UL94-V2 can be avail upon request

Dimensions

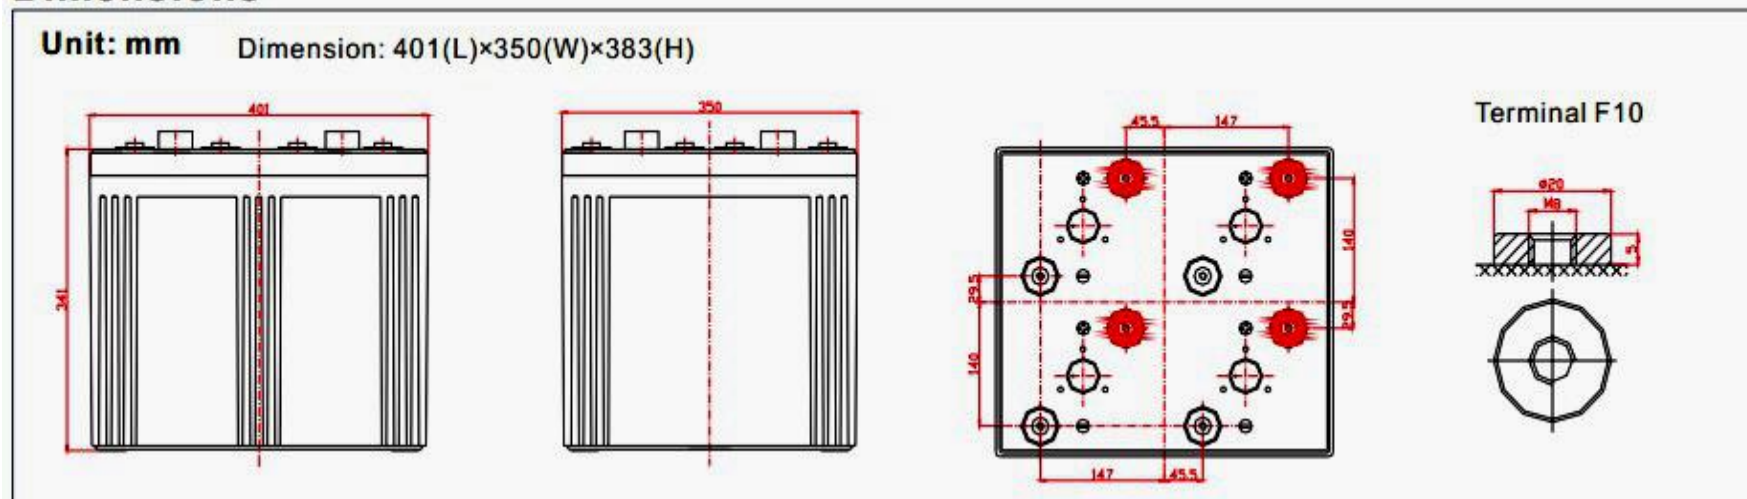

Constant Current Discharge Characteristics: A(25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	2037	1502	966.6	574.6	427.9	341.1	287.3	241.3	194.8	162.8
1.65V	1937	1442	924.7	553.6	410.0	329.2	275.3	235.5	186.0	160.0
1.70V	1806	1359	906.7	544.6	401.0	326.2	272.3	229.7	183.1	157.1
1.75V	1603	1223	834.9	514.7	380.0	308.2	260.3	218.0	177.3	154.2
1.80V	1380	1114	787.0	490.8	365.1	305.2	251.4	215.1	174.4	151.3
1.85V	1167	1003	727.2	463.8	347.1	281.3	239.4	203.5	165.7	141.0


Constant Power Discharge Characteristics: W(25°C)

F.V/Time	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	6HR	8HR	10HR
1.60V	3565	2737	1770	1064	797.5	641.1	542.9	465.5	370.6	314.3
1.65V	3472	2723	1764	1049	781.8	631.6	536.8	459.6	367.5	311.3
1.70V	3280	2577	1732	1034	769.9	629.1	532.0	448.9	361.8	306.5
1.75V	2922	2322	1595	978.5	742.3	597.5	509.7	426.8	350.4	301.6
1.80V	2529	2119	1504	934.5	711.6	594.8	493.1	421.7	344.8	290.8
1.85V	2156	1910	1390	884.6	677.9	550.9	470.6	399.5	327.6	280.0


All mentioned values are average values.




Temperature and Valid Capacity

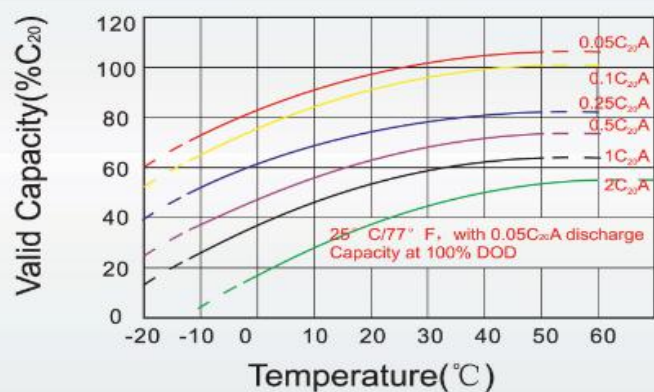


Discharge Characteristics at Various Rates @25°C/77°F

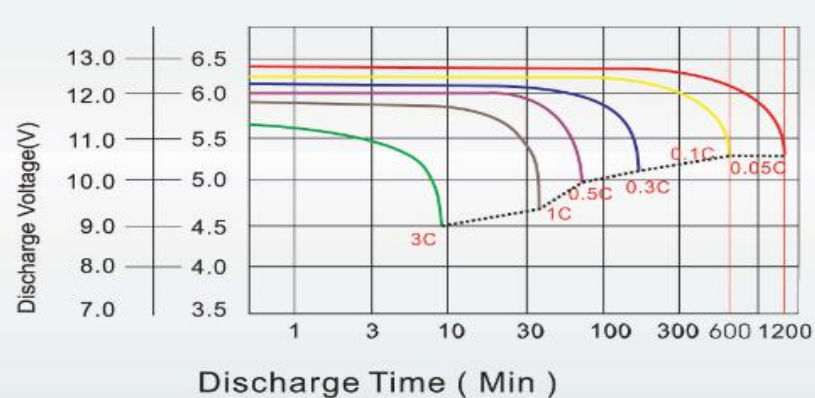

Charge characteristic curve for standby use

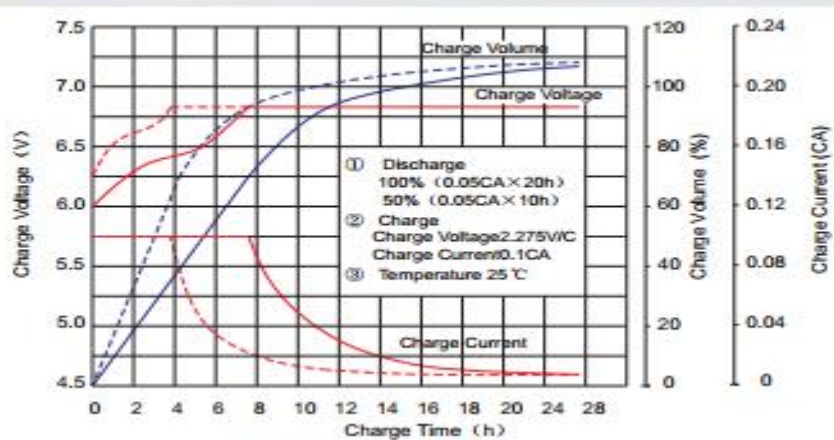

Storage characteristic

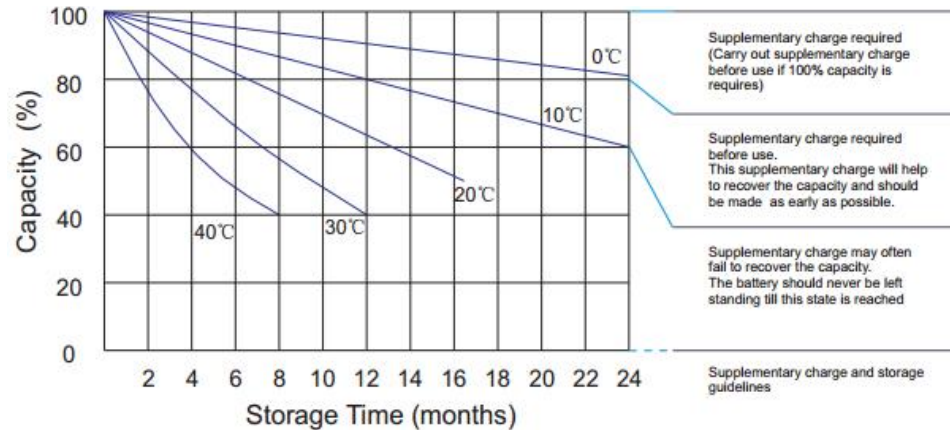

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	$A \leq 0.2C$	$0.2C \leq A \leq 1.0C$	$\geq 1.0C$

Charge the batteries at least once every six months, if they are stored at 25°C

Charging Method:

Constant Voltage	$-0.2C \times 2h + 2.4-2.45V/cell \times 24h$, Max. Current 0.3CA
Constant Current	$-0.2C \times 2h + 0.1CA \times 12h$
Fast	$-0.2C \times 2h + 0.3CA \times 4.0h$

Maintenance & Cautions

Float Service

- ※ Every month, recommend inspection every battery voltage
- ※ Every three months, recommend equalization charge for one time.

Equalization charge method:

Discharge: 100% rate capacity discharge.

Charge: Max. Current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h

- ※ Effect of temperature on float charge voltage: -3mV/Cell.
- ※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.

Contact us:

Fujian Yaheng Power Technology Group Co.,Ltd

Add: Yaheng Industrial Park, Jianyang District, Nanping City, Fujian Province, China

Website:www.yahengpower.com Email:liwendu@yahengpower.com

Tel:+86-599-5837578 Fax:+86-599-5823986

Yaheng Power Shenzhen office:

Rm D703, UNIS, Langshan Rd. 13, North high-tech industrial park, Nanshan District, Shenzhen City

Tel:+86-755-86962682 Fax:+86-755-26905060 Email:sales01@yahengpower.com